

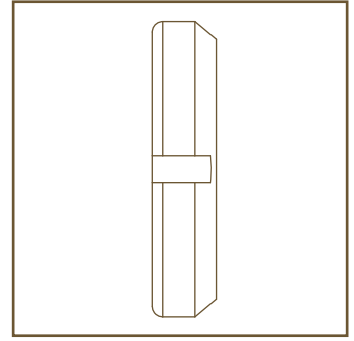




whittet-higgins company

MILITARY SPECIFICATION LOCKNUT - MS19068-XX3 SERIES



PART NUMBER	THREAD	MAX OUTSIDE DIAMETER (INCHES)	MAX FACE DIAMETER (INCHES)	MAX WIDTH (INCHES)	THEORETICAL AXIAL LOAD (LBS)	CAD MODEL	PART PRINT
MS19068-003	0.391-32	0.750	0.625	0.229	2300	STEP	PDF
MS19068-013	0.469-32	0.875	0.719	0.323	4400	STEP	PDF
MS19068-023	0.586-32	1.000	0.813	0.323	5500	STEP	PDF
MS19068-033	0.664-32	1.125	0.938	0.354	7000	STEP	PDF
MS19068-043	0.781-32	1.375	1.125	0.385	9200	STEP	PDF
MS19068-053	0.969-32	1.563	1.281	0.416	12500	STEP	PDF
MS19068-063	1.173-18	1.750	1.500	0.416	14300	STEP	PDF
MS19068-073	1.376-18	2.063	1.813	0.448	18600	STEP	PDF
MS19068-083	1.563-18	2.250	2.000	0.448	21100	STEP	PDF
MS19068-093	1.767-18	2.531	2.281	0.448	23700	STEP	PDF
MS19068-103	1.967-18	2.688	2.438	0.51	31300	STEP	PDF
MS19068-113	2.157-18	2.969	2.656	0.51	34100	STEP	PDF
MS19068-123	2.360-18	3.156	2.844	0.541	40200	STEP	PDF
MS19068-133	2.548-18	3.375	3.063	0.573	46700	STEP	PDF
MS19068-143	2.751-18	3.625	3.313	0.573	50400	STEP	PDF
MS19068-153	2.933-12	3.875	3.563	0.604	51700	STEP	PDF
MS19068-163	3.137-12	4.156	3.844	0.604	55100	STEP	PDF
MS19068-173	3.340-12	4.406	4.031	0.635	62900	STEP	PDF
MS19068-183	3.527-12	4.656	4.281	0.698	74500	STEP	PDF
MS19068-193	3.730-12	4.938	4.563	0.729	83600	STEP	PDF
MS19068-203	3.918-12	5.188	4.813	0.76	92400	STEP	PDF
MS19068-213	4.122-12	5.438	5.000	0.76	96400	STEP	PDF
MS19068-223	4.325-12	5.719	5.281	0.791	106600	STEP	PDF
MS19068-243	4.716-12	6.125	5.688	0.823	122300	STEP	PDF
MS19068-263	5.106-12	6.750	6.188	0.885	145200	STEP	PDF
MS19068-283	5.497-12	7.094	6.531	0.948	170400	STEP	PDF
MS19068-303	5.888-12	7.688	7.063	0.979	189900	STEP	PDF
MS19068-323	6.284-8	8.063	7.438	1.041	217200	STEP	PDF
MS19068-343	6.659-8	8.656	8.031	1.073	239100	STEP	PDF
MS19068-363	7.066-8	9.063	8.375	1.104	262800	STEP	PDF
MS19068-383	7.472-8	9.489	8.781	1.135	287600	STEP	PDF
MS19068-403	7.847-8	9.844	9.156	1.198	318200	STEP	PDF

FOR ADDITIONAL ENGINEERING SUPPORT: (401) 728-0700